

INSTALLATION PROCEDURE

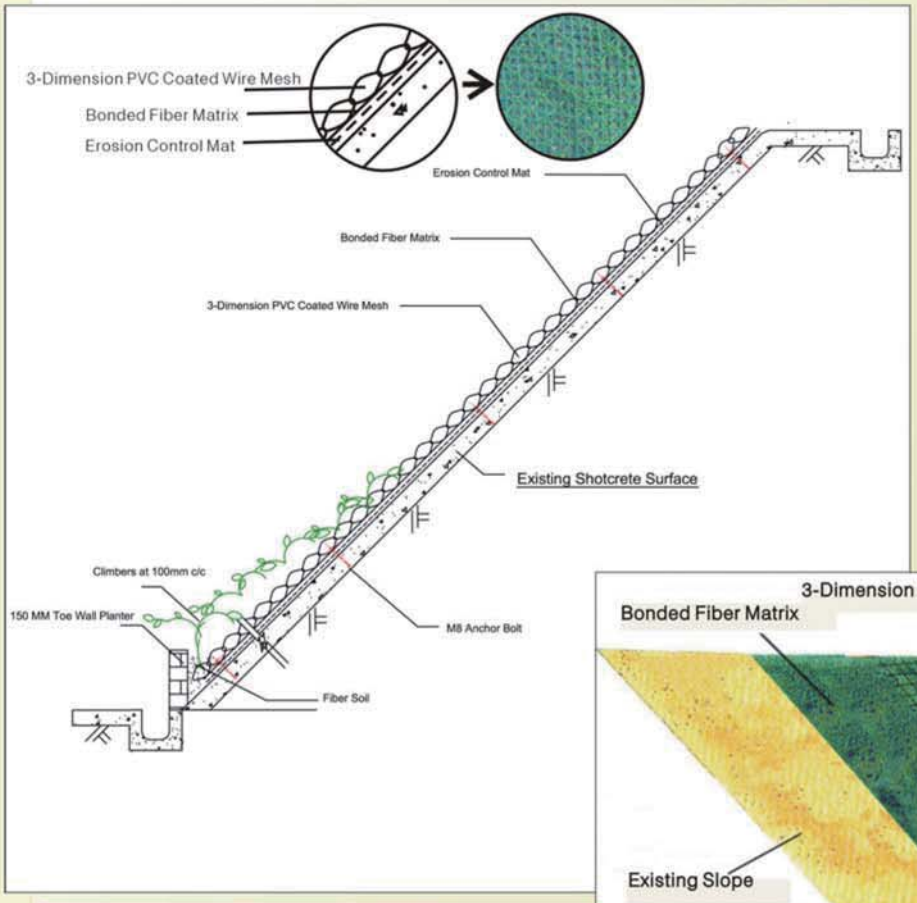

Typical Detail of Eco-Climber System on Slope

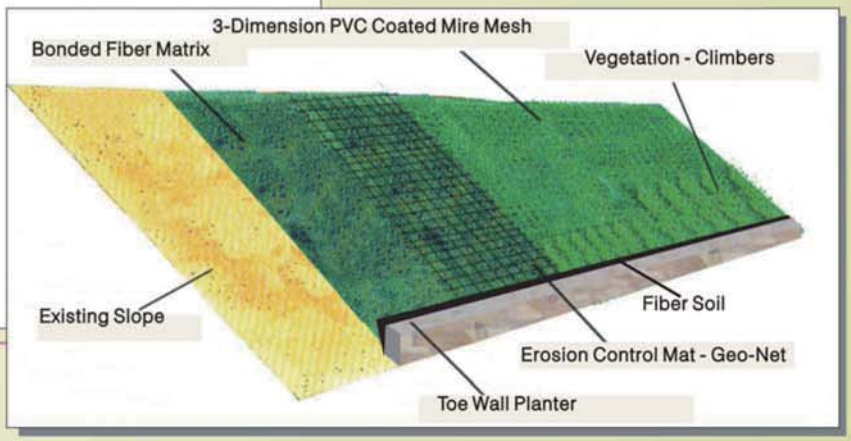

General installation procedure:

1. General site clearance.
2. Installation of precast toe planter
3. Enrolling the Geo-Net parallel to the slope with the maximum lapping of 50 mm
4. Enrolling the 3-Dimension pvc coated galvanized wire mesh
5. Fixing of nets with anchor bolt
6. Application of Bonded Fiber Matrix with fertilizer and seed.
7. Filling of Fiber Soil with climber species.

PROPOSED NATIVE PLANT SPECIES

Creeper :



Scindapsus aureus
綠蘿



Parthenocissus_himalayana_
爬牆虎



Zebrina purpusii
紫吊竹草



Ficus pumila
薜荔



Hedera helix cv Glacier
銀葉常春藤

Vine :



Campsis grandiflora
淩霄



Trachelospermum jasminoides
絡石



Bauhinia glauca
羊蹄甲藤



Lonicera japonica
金銀花



Quisqualis indica L
使君子

TOYO GREENLAND CO., LTD.
東陽綠化有限公司
No.39, Middle Section, Wa Shan Tsuen, Sheung Shui, N.T., Hong Kong
香港新界上水華山村中段 39 號
Tel 電話 :（852）2639 9312 傳真 :（852）2377 2150
Web-site 網站 : www.toyogreen.com E-mail 電郵 : danielho@toyogreen.com