MAGIC PLANTING BLOCK

The Properties of the Eco-Block

(a)PH value	6.0	to	7.5
(b)Moisture content	30 %	to	35 %
(c)Organic matter content (dry weight)	50 %	to	90 %
(d)Organic carbon content (dry weight)	40 %	to	60 %
(e)Total Nitrogen content (dry weight)	0.1 %	to	1.5 %
(f)Carbon: Nitrogen ratio	35:1	to	50:1
(g)Dry density	400 kg/m^3	to	450 kg/m^3
(h)Saturated density	350 kg/m^3	to	400 kg/m^3




Advantages:

* It can be planted on the wall
* Full vegetation on non-soil surface
* High resistance to rain erosion
* High water retaining capacity
* Long lasting fertilizer
* High gas permeability
* Light in weight



Application of Eco-Block :

* Green Roof System
* Flower Pot
* Vertical Planting
* Stream Bank Rehibitation

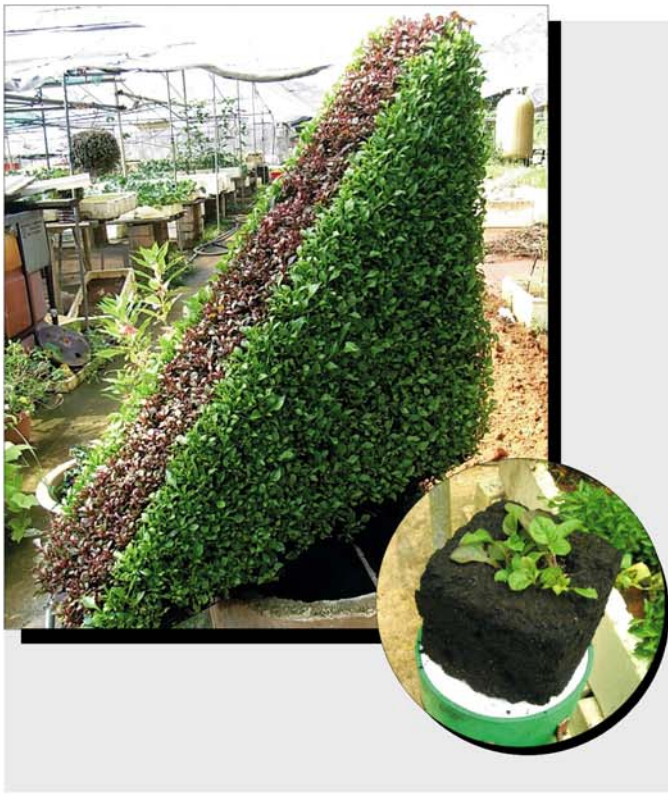

TOYO GREENLAND CO., LTD.
東陽綠化有限公司
No.39, Middle Section, Wa Shan Tsuen, Sheung Shui, N.T., Hong Kong
香港新界上水華山村中段 39 號
Tel 電話 :（852）2639 9312 傳真 :（852）2377 2150
Web-site 網站 : www.toyogreen.com E-mail 電郵 : danielho@toyogreen.com

ISO 9001 ISO 14001 ISO 45001